


BOLERO

Flip Top Table With Ash Top



Parts list:

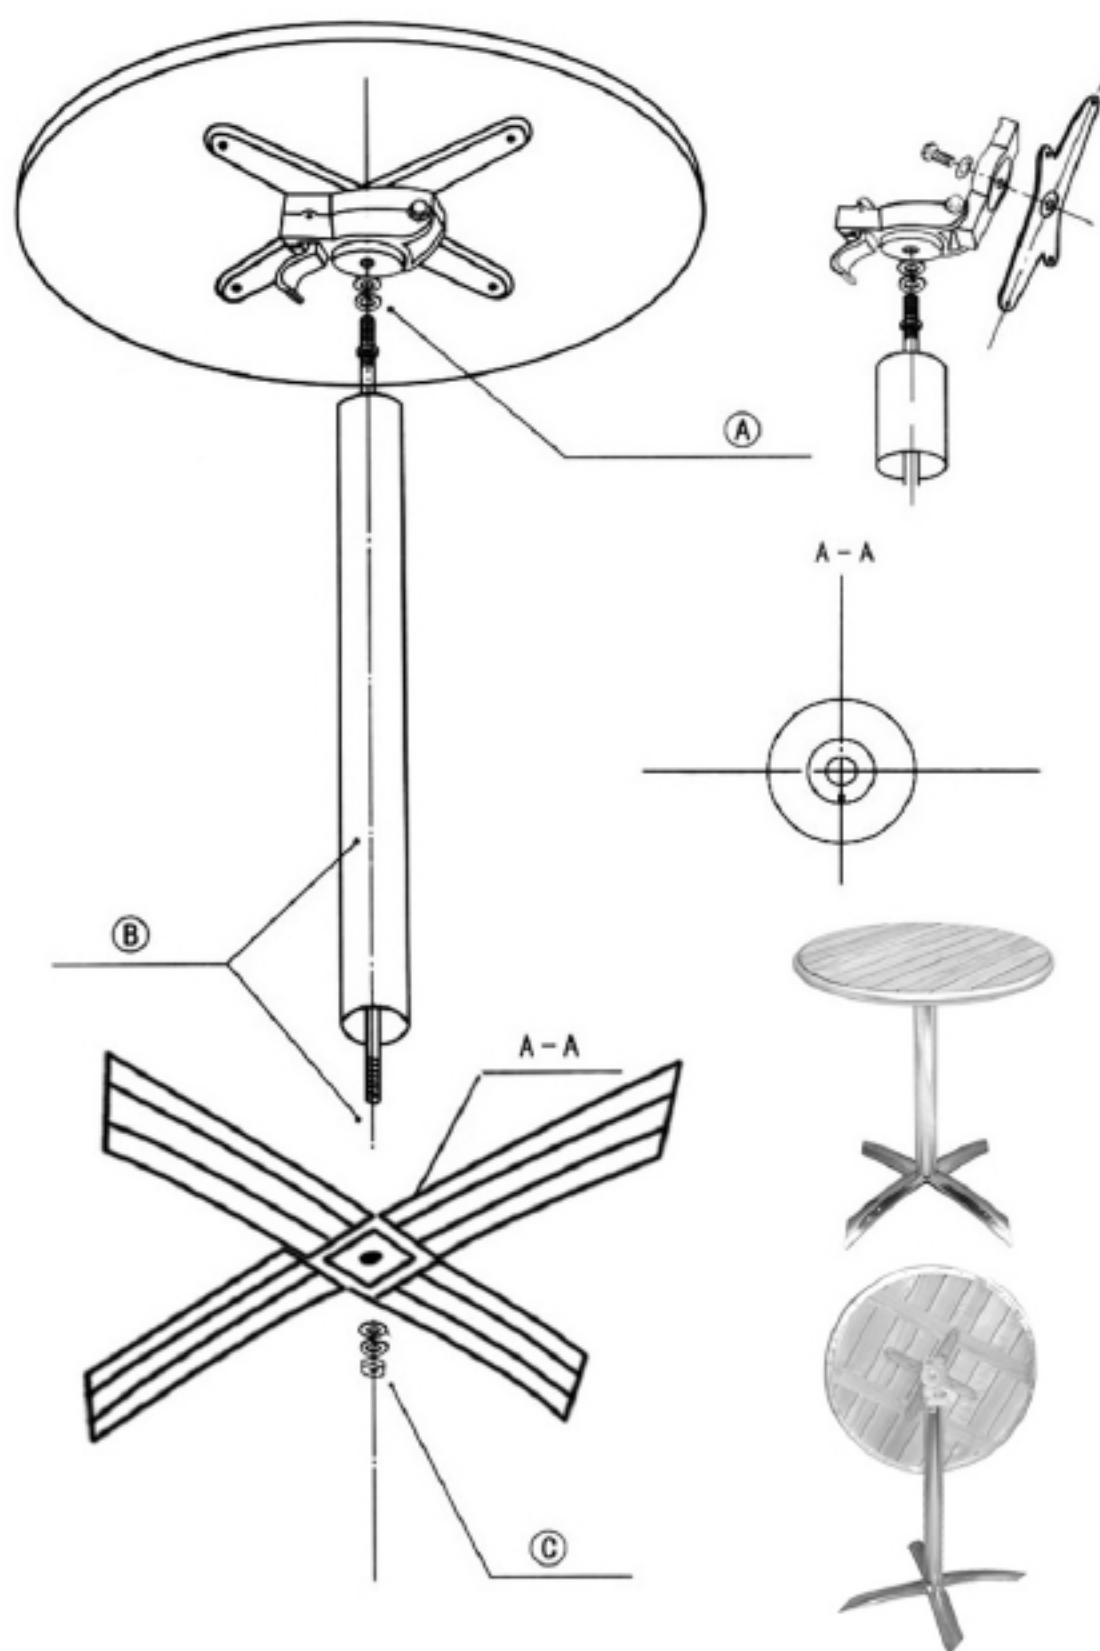


1 x Table Top
with Flip Unit



1 x Aluminium Tube



1 x Rod



2 x Hexagonal Nut




2 x Flat Washer



1 x Spanner



1 x Hexagonal Nut
Tightening Tool

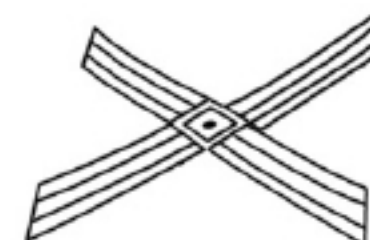

1 x Die-Casted
Aluminium Foot
Base



2 x Spring Washers

Assembly instructions:

1. Thread a hexagonal nut onto one threaded end of the Rod with a spring washer to follow.
2. Place a flat washer over the hole of the flip top unit and insert the threaded end of the rod into the unit.
3. Open the unit to check that the tip of the threaded rod is flush to the hole, and does not extend inside
4. Tighten the nut back down onto the unit using the spanner supplied
5. Place the aluminium tube over the threaded end of the rod, ensuring that the end of the tube is securely positioned on the flip top unit (see detail A)
6. Place the aluminium foot base over the end of the threaded rod, ensuring the notch at the bottom of the tube lines up with the lug on the base (as shown in detail A-A)
7. Place a flat washer, a spring washer and a hexagonal nut on the end of the threaded rod and tighten using the socket spanner (See detail B & C)

Maintenance:

Wood is a natural material whose appearance will deteriorate when left outside. A surface coating is vital in protecting it from premature darkening or splitting, when exposed to the weather. The finish should be regularly maintained to ensure that the wood is protected from moisture and the furniture continues to look its best.

In order to maintain the appearance of the wood, regular coatings of furniture wood treatment should be applied in accordance with the instructions supplied with the product. The frequency will depend on the weather conditions experienced.

If positioned in an exposed position, we recommend the use of a parasol to prevent oils from drying out and flaking. This will help maintain the appearance of the table surface.

In order to maintain its appearance, this wooden furniture should be protected from severe weather and stored under cover during winter. A liberal coating of treatment should be given to the furniture before it is laid up and again when it is removed from storage.

Should you choose not to treat your furniture then it will turn a greyish colour and develop cracks. Light sanding can restore the original colour after which treatment can be regularly applied in accordance with the instructions above.